




OWNER'S MANUAL

CHARGE**MONITOR**MAX

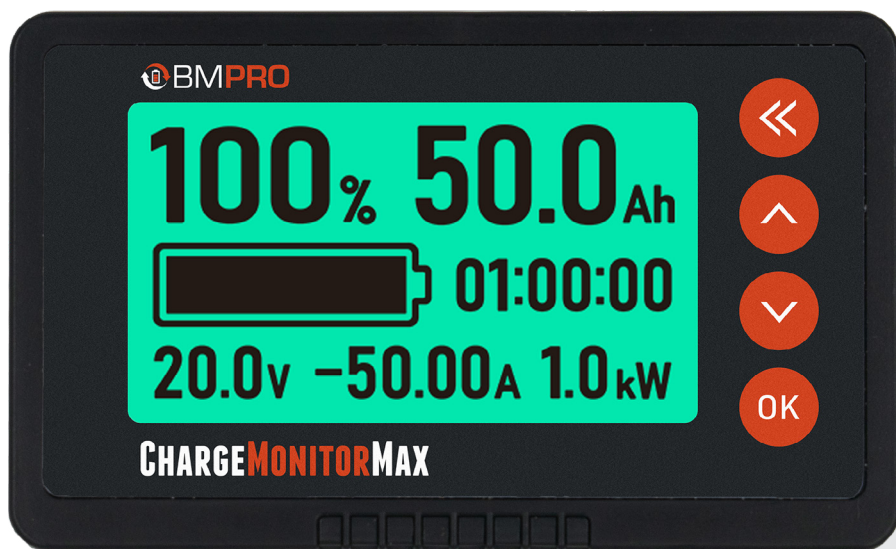

TEAMBMPRO.COM

SAFETY PRECAUTIONS

Please read the Safety Precautions before installing or using the ChargeMonitorMax. Be sure to observe all precautions without fail. Failure to observe these instructions properly may result in personal damage or personal injury which, depending on the circumstances, may be serious and cause loss of life.

WARNING



Correct installation is the most critical factor in ensuring the safe use of the device. If every consideration of these instructions has been satisfied, the device will be safe to operate.



Metal conducts electricity. Take care not to drop or touch metal objects onto the battery terminals. If contact is made, this may cause short circuits or lead to serious personal injury. Take care and remove unwanted metal objects from the vicinity of the battery. Remove any personal metal adornment such as chains, watches or rings before handling the battery.



Batteries are electrically live at all times and must be treated with extreme caution. They can supply high short circuit currents, even if they appear damaged or undamaged.



Do not drop or shake the product vigorously as this may cause damage to the product. Do not shock the equipment, batteries and charger, as this may cause device or battery failure, fire or explosion.



Keep the device dry; do not expose it to water. Do not use it where it can fall into water (such as near a pool, pond, bath etc.). Do not let the device, battery or charger come into contact with water vapour or operate it with wet hands. Contact with water will cause the device to short-circuit, corrode or cause electric shock.



Do not use this product where it is excessively hot, cold, dusty or humid, or where it is exposed to strong magnetic fields or long periods of sunshine. Such exposure may cause device or battery failure, fire or explosion.



Only use the device with the cable supplied. Use of other accessories not recommended in this manual may cause damage to the unit and will void the warranty.



Clean the housing of the device lightly with a dry or moist cotton cloth if required. Do not use alcohol, thinners, benzene or any other chemical cleaner.



This device is a high precision electronic product. It contains no user-serviceable parts inside. Do not try to dismantle, modify or repair it yourself. Disassembly by unauthorised persons will void the warranty.



Product specifications are subject to change and improve without notice.

INFORMATION FOR THE USER

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Warning: Any changes or modifications not expressly approved by BMPRO could void the user's authority to operate this equipment.

CONTENTS

- SAFETY PRECAUTIONS 2
 - INFORMATION FOR THE USER 3
- ABOUT THE CHARGEMONITORMAX 6
- DESCRIPTION OF PARTS. 7
 - CHARGEMONITORMAX. 7
 - LCD SCREEN 8
 - SHUNT 8
- WIRING THE CHARGEMONITORMAX 9
 - WIRING DIAGRAM. 10
- INSTALLING THE CHARGEMONITORMAX 11
 - INSTALLING THE DISPLAY 11
 - MOUNTING THE SHUNT 11
- CONFIGURING THE CHARGEMONITORMAX 12
 - BATTERY PARAMETERS 12
 - SETTING BATTERY PARAMETERS 13
 - SETTING BATTERY PERCENTAGE 13
 - SLEEP MODE. 14
 - BACKLIGHT 14
- SPECIFICATIONS. 15
- WARRANTY TERMS AND CONDITIONS 16

ABOUT THE CHARGE MONITOR MAX


The ChargeMonitorMax is a wired device designed to monitor and display your battery performance using real-time data, allowing you to effectively track your battery's remaining energy through an intuitive display.

Compatible with a variety of standard lead-acid and LiFePO4 lithium batteries, the ChargeMonitorMax can be used to instantly view volts, amps, state of charge, and remaining battery capacity, making it ideal for devices like microwaves, inverters, and hair dryers.

The ChargeMonitorMax will ensure you always have enough power for your high-current devices and keep your adventures on track!


DESCRIPTION OF PARTS

CHARGE MONITOR MAX

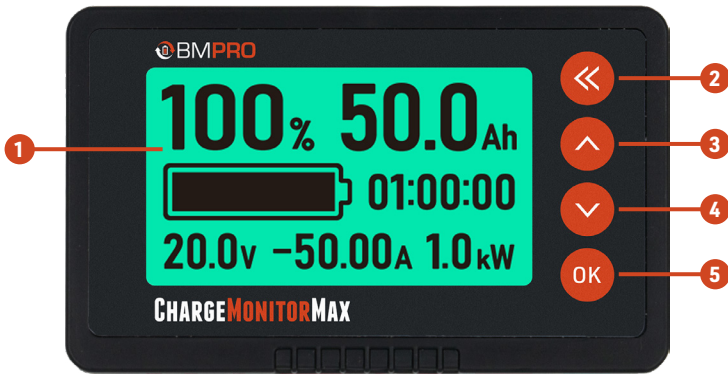


1. LCD Screen
2. Exit << Button
3. Up Navigation Button
4. Down Navigation Button
5. Menu/Select Button

LCD SCREEN

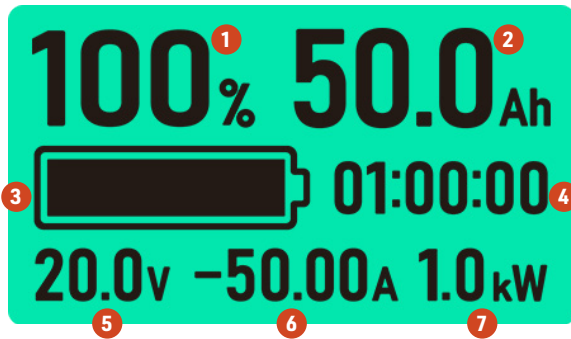

1. State of Charge Percentage
2. Remaining Battery Capacity
3. Present State of Charge
4. Remaining Time Before Battery Discharged
5. Battery Voltage
6. Battery Current
7. Battery Power

SHUNT

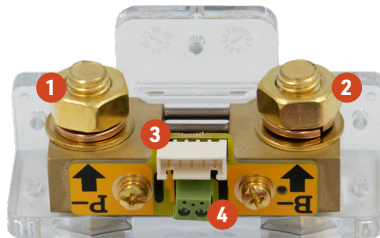

1. **P- Terminal**
Connects to the load or the charger.
2. **B- Terminal**
Connects to the negative terminal of the battery.
3. **Shielded Data Cable Connection**
4. **Battery Positive Wire Connection**

WIRING THE CHARGE MONITOR MAX



WARNING

Installation of the ChargeMonitorMax should only be carried out by suitably qualified personnel. Failure to install the ChargeMonitorMax correctly could result in bodily harm.



WARNING



Ensure that all loads connected to the battery are disconnected or turned off before beginning the installation to avoid sparks being generated.

Ensure all battery cable sizes are correct for the maximum load through the shunt.

To wire the ChargeMonitorMax shunt.

1. Connect the B- terminal of the shunt to the negative terminal of the battery.
2. Connect the P- terminal of the shunt to the load or the charger.
3. Connect one end of the shielded data cable to the current shunt.
4. Connect the other end of the shielded data cable into the back of the monitor display.
5. Connect the battery positive wire to the positive terminal of the battery. It is recommended to install a 3A in-line fuse on the positive wire.

WIRING DIAGRAM

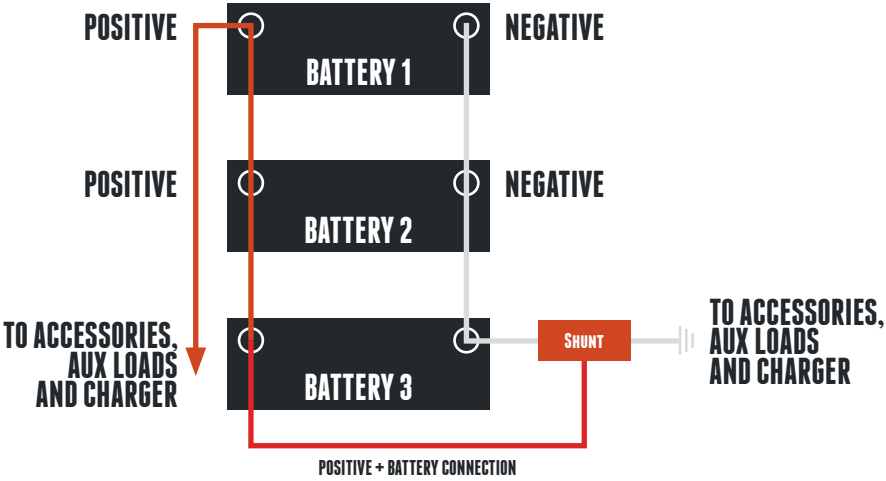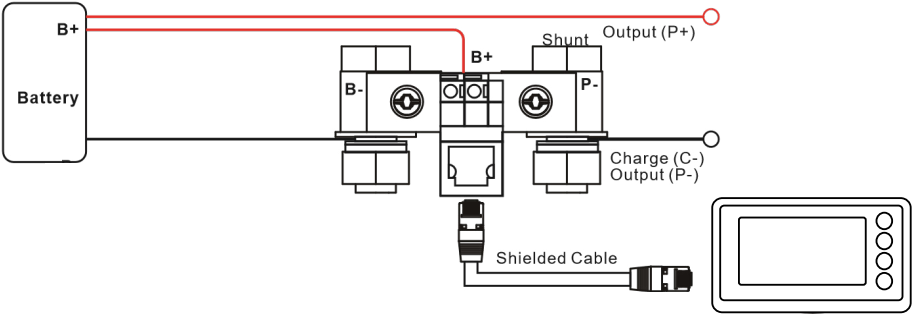


INSTALLING THE CHARGE MONITOR MAX

INSTALLING THE DISPLAY

To install the display:

1. Cut a rectangular hole 94mm wide and 57mm high on the installed equipment panel.
2. Push the ChargeMonitorMax display into the hole from the front of panel.
3. Ensure tabs are locked in.

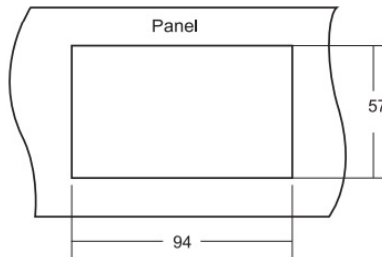

MOUNTING THE SHUNT

Before mounting the shunt, consider the length of the cables when determining a suitable place for the shunt to be positioned.

The shunt must be installed in an area with adequate ventilation and protection from water or dust ingress.

Once a suitable location has been determined, use two appropriately sized screws to secure the shunt to a solid surface. The type of screw required will depend on the surface material you are mounting shunt to.



CONFIGURING THE CHARGE MONITOR MAX

BATTERY PARAMETERS

CAP: 0100.0Ah ◀
Full V: 000.0 V
Zero V: 000.0 V
PowOff: 000.0 V
Alarm: 000.0 Ah
Atten: 0.000 %

OPTION	MEANING
CAP	Effective capacity of battery. This defaults the initial capacity from the factory. Set according to the actual effective capacity of the battery bank to view the accurate capacity percentage.
Full V	Full capacity voltage. The capacity value is automatically set to 100% after the voltage is exceeded during charging. The recommended setting is 0.2V below the bulk/absorption voltage of the charger.
Zero V	Zero capacity voltage. The capacity value is automatically set to 0% if below this voltage. The voltage value will flash and the buzzer will alarm every 10 seconds if the discharge continues. For lead-acid batteries, the recommended setting is 10.5-10.8V. For lithium batteries, the recommended setting is 11.5-12.0V.
PowOff	Shutdown voltage. The backlight and LCD will turn off and not display if below this capacity. The recommended setting is 0.1-0.2V below the zero voltage setting.
Alarm	Low capacity alarm. The percentage and battery symbol will flash and the buzzer will sound every 10 seconds if below this capacity. The recommended setting is generally 20% of the effective capacity of the battery. This may be different depending on your usage.
Atten	Battery attenuation ratio. The rate of degradation of the battery capacity per charge/discharge cycle. The capacity value is automatically changed according to this ratio. The recommended setting is 0.02%.



WARNING

If a value is set to 0, that feature will be disabled.

Refer to your battery specifications for correct settings for each of the parameters.

SETTING BATTERY PARAMETERS

When using the ChargeMonitorMax with a battery for the first time, the battery parameters will need to be set.



WARNING

The ChargeMonitorMax will not set battery parameters automatically. If parameters are not set, the ChargeMonitorMax will not give accurate readings.

To set the battery parameters on the ChargeMonitorMax:

1. Press the **OK** button for 3 seconds to enter the settings menu.
2. Use the up and down arrows to navigate through the battery parameters.
3. When the line cursor is on the correct item, press the **OK** button to edit it.
4. Use the up and down arrows to select the correct values. Press the **OK** button to move editing to the next value.
5. Once correct value is visible, press the **<<** button to save and exit.

For the most accurate readings, enter the usable capacity of the battery.
The usable capacity of the battery may not be the rated capacity of the battery.

SETTING BATTERY PERCENTAGE

When using the ChargeMonitorMax with a new battery for the first time, the displayed state of charge percentage will not be an accurate value of the battery. The ChargeMonitor's capacity percentage will need to be reset.

Either of the following methods can be used to reset the ChargeMonitorMax's capacity percentage:

Method 1

1. Fully discharge the battery.
2. Press and hold the down arrow button for 3 seconds.
3. The capacity will be set to 0%.

Method 2

1. Fully charge the battery.
2. Press and hold the up arrow button for 3 seconds.
3. The capacity will be set to 100%.

SLEEP MODE

When input/output current is low, the screen will enter sleep mode.

The ChargeMonitorMax will wake from sleep mode if a button is pressed or when input/output current increases.

While in sleep mode, current is not taken into account for state of charge calculations.

BACKLIGHT

When the battery is being charged, the LCD screen's backlight will slowly flash.

To turn off the backlight, press and hold the << button.

To turn the backlight on, press and hold the << button again.

To adjust the brightness of the backlight, use the up and down arrow buttons.

SPECIFICATIONS

CHARGE MONITOR MAX	
Working Voltage	10-120V
Voltage Accuracy	±1%
Current Accuracy	±1%
Capacity Accuracy	±1%
Backlight on Current (>50A)	100mA
Present Capacity Value	0.1-9999Ah
Temperature Range	-10 - 60°C
Weight (LCD Interface)	75g
Size (LCD Interface)	99x61x18mm
Shielded Wire Length	6 m
B+ Wire Length	1 m

WARRANTY TERMS AND CONDITIONS

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

This warranty is provided by SETEC BMPRO Pty Ltd (59 646 354 127) ("BMPRO") for its products. Warranty benefits are applied along with any rights and remedies required by Australian State and Federal legislation that cannot be excluded. No part of this warranty excludes, restricts or modifies any State or Federal legislation relating to the supply of goods and services which cannot be excluded, restricted or modified.

WARRANTY

BMPRO warrants that the product will be free from any faults in materials and workmanship beginning from the original date of purchase under standard application, installation, use and service conditions, subject to the exclusions and limitations detailed below. The warranty period of the product is two years.

If, before the warranty period has ended, a fault occurs with the product and BMPRO finds the product is defective in materials or workmanship, BMPRO at its discretion will subject to further rights accorded by the Australian Consumer Law to either:

- Repair the defective product
- Replace the defective product
- Provide a refund to the purchaser for the price paid at purchase for the defective product.

WARRANTY CLAIMS

Refer to your manual before using the product. Most BMPRO products are designed to be installed by a suitably qualified installer. The products should be carefully inspected by you or your installer before installation for any visible manufacturing faults. If a product has been installed incorrectly, BMPRO accepts no responsibility on top of our consumer guarantee obligations.

1. If a fault covered by warranty occurs, the purchaser must either contact the dealer where the product was purchased within 7 days, or BMPRO at the contact details listed.
2. All warranty claims must include: (a) proof of purchase of the product; (b) complete details of the alleged fault; (c) any relevant documentation related to the fault (such as photographs or maintenance records); (d) return material authorisation (RMA) number.
3. The product must be made available to BMPRO or its authorised installer for inspection and testing within 14 days of contacting BMPRO or the dealer.
4. The reasonable cost of delivery and installation of any products or components of products that have been repaired or replaced to the place of purchase notified to BMPRO is covered by the warranty provided by BMPRO, along with the reasonable costs of removal and return of any products determined by BMPRO to be defective.
5. If, on return to BMPRO or on investigation by BMPRO, inspection and testing determines there is no fault in the product, the purchaser must pay BMPRO's reasonable costs of testing and investigating the product, as well as transportation and shipping costs.

REGISTER A WARRANTY OR REPAIR WITH BMPRO

To register a warranty or repair with BMPRO:

1. Lodge a support request via teambmpro.com/technical-support or email customerservice@teambmpro.com
2. If agreed with the BMPRO Product Specialist team, register a warranty claim or repair via teambmpro.com/warranty-claim or email customerservice@teambmpro.com to obtain a Return Material Authorisation (RMA) number.
3. Package and send the product to:

BMPRO Warranty Department
19 Henderson Road
Knoxfield, VIC 3180

Please mark RMA details on the outside of the packaging.

4. Ensure your package also includes a copy of the proof of purchase, a complete description of the fault and your contact details including phone number and return address.

EXCLUSIONS

This warranty will not be applicable where: (a) the product has been altered, modified or repaired by someone other than BMPRO, an authorised installer or a qualified auto electrician; (b) the product has not been installed properly by either the user or manufacturer; (c) BMPRO cannot establish a fault in the product after inspection and testing; (d) the product has been used for purposes other than that for which it was designed; (e) the fault in the product has occurred due to a failure by the purchaser to ensure proper use and maintenance of the product according to BMPRO's instructions, recommendations and specifications (including maintenance); (f) the product has been subjected to abnormal conditions, such as environmental, temperature, water, fire, humidity, pressure, stress or similar; (g) the fault has been caused by abuse, misuse, neglect or accident; (h) the fault has been caused by a power surge or other kind of fault in the supply of electricity; (i) unauthorised parts or accessories have been used on or in relation to the product; (j) the appearance of the Product has deteriorated; or (k) the fault is a result of common wear & tear.

LIMITATIONS

No express warranties or representations are made by BMPRO other than what is set out in this warranty. The absolute limit of BMPRO's liability under this express warranty is the repair or replacement of the product or part of the product.

CONTACT

BMPRO's contact details for warranty claims are:

SETEC BMPRO Pty Ltd
19 Henderson Road,
Knoxfield, VIC 3180
Phone: (03) 9763 0962
Email: customerservice@teambmpro.com

Warranty Claim and Product Repair Form:
<https://teambmpro.com/warranty-claim/>

Registering your BMPRO product is an important step to ensure that you receive all the benefits you are entitled to.

Please complete the online registration form at <https://teambmpro.com/product-registration/> for your new product today.

POWERING YOUR ADVENTURES.



**TEAM
BMPRO
.COM**

BMPRO

customerservice@teambmp.com

19 Henderson Rd, Knoxfield VIC 3180 Australia | Unit 1, 821 E Windsor Ave, Elkhart IN 46514 USA

teambmp.com