

PGK 4P WP Enclosures IP66 SE008A


PGK 4 Pole DIN Rail Mounting Waterproof Enclosure



Technical Specifications	
Type	SE008A
Protection class	IP65 (IEC60529)
Installation place	Outdoor / Indoor
Color	Grey
Material	Polycarbonate
UV Resistance	Yes
Gland entries	4pcs x M25
Fixing screws	6pcs
Padlockable	Yes
DIN Rail mounting	Yes
Caps for base hole	4pcs
Caps for top screw	4pcs
Measurement (LxWxH)	205*99.5*110mm
Earth terminal	/
Neutral terminal	/
Impact resistance	70kJ/m2


Installation Guide

Vertical

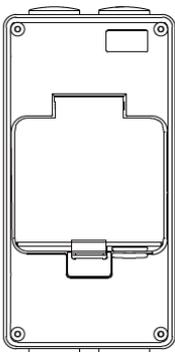

- Use internal mounting screw caps to maintain IP rating in base.
- Ensure all screws of cover are tight to 1-1.5 N.m
- Fit caps over lid screws to maintain IP rating.
- No restrictions in mounting.

Horizontal

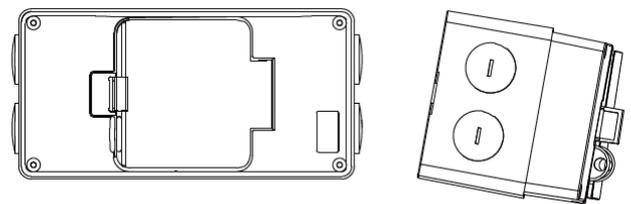

- Use internal mounting screw caps to maintain IP rating in base.
- Ensure all screws of cover are tight to 1-1.5 N.m
- Fit caps over lid screws to maintain IP rating.
- Ensure angle > 5° from vertical and horizontal so water can not pool against gasket.
- Use SE008A to mount enclosures under panels.

Please Note:

Please consult with your Electrician/Engineer to ensure suitability for the intended application and installation.

PGK Distribution takes every precaution to ensure the information in this publication is correct but accepts no liability of any kind and reserves the right to change any detail in this catalogue without notification.

PGK Distribution

VIC Main Office

8 Mohr St Tullamarine, Vic 3043

T: 1300 PGK SOL